



CLOSED INTERMEDIATE INDUSTRIAL PALLET WITH RUNNERS

FUTURE LAUNCHES BASIC PRO 1210-C3

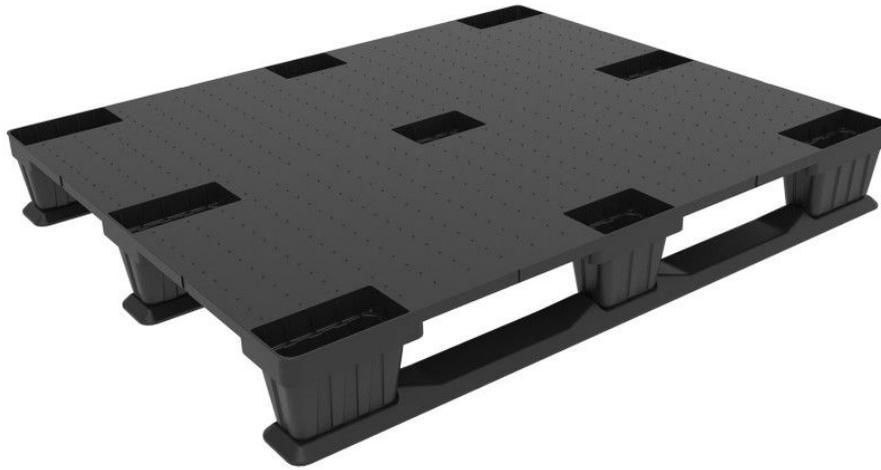

Closed plastic pallet, 1200 x 1000 mm, medium-weight. It is 52% lighter than a conventional pallet.

Advantages

- ✓ Ranura especial para flejado
- ✓ Perímetro anti-impacto
- ✓ Superficie antideslizante
- ✓ Esquinas preparadas para un óptimo retráctilado
- ✓ Superficie completamente plana y sin orificios

Technical data

| Ref | Materials | Weigh | Measures | Static load*1 | Dynamic load*1 | Rack load*1 |
|-------------------|-----------|---------------------|-------------------------------------|-------------------|-------------------|------------------|
| BASIC PRO 1210-C3 | | 13.60 kg [30.00 lb] | 1200x1000x160mm [47.20x31.50x6.30"] | 3200 kg [7055 lb] | 1500 kg [3310 lb] | 600 kg [1325 lb] |

Logistic data


| Ref | 20' DV | 40' DV | 40 HC | 45' PWHC | Tauliner | Mega | Jumbo |
|-------------------|--------|--------|-------|----------|----------|------|-------|
| BASIC PRO 1210-C3 | - | - | - | - | - | - | - |

CLOSED INTERMEDIATE INDUSTRIAL PALLET WITH RUNNERS

FUTURE LAUNCHES BASIC PRO 1210-C3

Options

Technical drawing



Iconography legend



0°/40°C [32°/104°F]



Closed



4-ways

Recommendations for use

*1 The values indicated are approximate and are based on both practical experiences and ISO 8611 tests with a uniformly distributed standard load, distributed all over the pallet surface, duly consolidated, compact and stable and at ambient temperature (20°C [68°F]) for a specific time. Different load conditions produce different values that have to be checked at the customer's request. Any deterioration or breakage in the pallet may vary these results.

*2 Due to the characteristics of the materials recycled, the dimensions and the weight of the pallets may present certain tolerances. Dimensional tolerances according to DIN ISO 2768-V and weight tolerances: +/- 4%. Except for references of the FLAT category: +/- 3%.

- Nortpalet reserves the right to modify any information herein indicated without prior notice.

- The specifications can be affected in case of alteration of the product with parts and / or materials different from those approved by the Nortpalet quality department. Any warranty, specification or liability on the part of Nortpalet will be terminated in case of modification of the product with spare parts not supplied by Nortpalet.