



# INTERMEDIATE CLOSED NESTABLE EURO PALLET

FUTURE LAUNCHES BASIC PRO 1208-C9




European plastic pallet, intermediate weight and nestable. It is 60% lighter than a conventional pallet and occupies 70% less space when empty. It allows the incorporation of runners as option becoming the BASIC PRO 1208-O3 version.

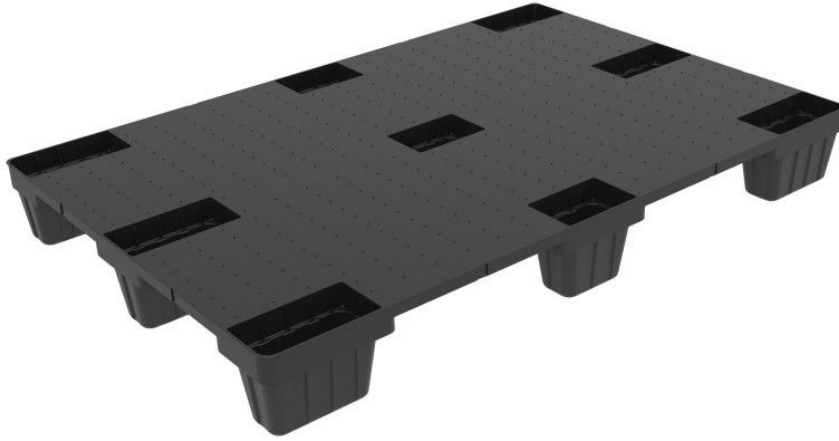






## Advantages

- ✓ Ranura especial para flejado
- ✓ Perímetro anti-impacto
- ✓ Superficie antideslizante
- ✓ Facilidad de extracción del palet sobre torre
- ✓ Esquinas preparadas para un óptimo retráctilado
- ✓ Superficie completamente plana y sin orificios

## Technical data

Ref	Materials	Weigh	Measures	Static load*1	Dynamic load*1	Rack load*1
BASIC PRO 1208-C9		9.00 kg [19.80 lb]	1200x800x140mm [47.20x31.50x5.50"]	3000 kg [6610 lb]	1400 kg [3085 lb]	- kg [- lb]

## Logistic data


Ref	 20' DV	 40' DV	 40 HC	 45' PWHC	 Tauliner	 Mega	 Jumbo
BASIC PRO 1208-C9	-	-	-	-	-	-	-

# INTERMEDIATE CLOSED NESTABLE EURO PALLET

FUTURE LAUNCHES BASIC PRO 1208-C9

## Options

## Technical drawing



### Iconography legend



0°/40°C [32°/104°F]



Closed



Nestable



4-ways

## Recommendations for use

\*1 The values indicated are approximate and are based on both practical experiences and ISO 8611 tests with a uniformly distributed standard load, distributed all over the pallet surface, duly consolidated, compact and stable and at ambient temperature (20°C [68°F]) for a specific time. Different load conditions produce different values that have to be checked at the customer's request. Any deterioration or breakage in the pallet may vary these results.

\*2 Due to the characteristics of the materials recycled, the dimensions and the weight of the pallets may present certain tolerances. Dimensional tolerances according to DIN ISO 2768-V and weight tolerances: +/- 4%. Except for references of the FLAT category: +/- 3%.

- Nortpalet reserves the right to modify any information herein indicated without prior notice.

- The specifications can be affected in case of alteration of the product with parts and / or materials different from those approved by the Nortpalet quality department. Any warranty, specification or liability on the part of Nortpalet will be terminated in case of modification of the product with spare parts not supplied by Nortpalet.