

CLOSED LIGHT INDUSTRIAL PALLET WITH RUNNERS

LIGHTWEIGHT BASIC 1210-C3



Ideal equipment for loads with lift storage increasing the support surface and avoiding damage to the product of the lower layer. Suitable for automated lines with roller conveyors being the pallet of its dimensions and surface closed with the lightest runners. The runner are removable which allows to transform the product into BASIC 1210-C9.

Advantages

- ✓ Ranura especial para flejado
- ✓ Perímetro anti-impacto
- ✓ Superficie antideslizante
- ✓ Esquinas preparadas para un óptimo retráctilado
- ✓ Superficie completamente plana y sin orificios

Technical data

Ref	Materials	Weigh	Measures	Static load*1	Dynamic load*1	Rack load*1
BASIC 1210-C3	rPE rPP	10.10 kg [22.25 lb]	1200x1000x160mm [47.20x39.40x6.30"]	2000 kg [4410 lb]	1200 kg [2645 lb]	400 kg [880 lb]

Logistic data

Ref	20' DV	40' DV	40 HC	45' PWHC	Tauliner	Mega	Jumbo
BASIC 1210-C3	130	273	336	416	416	468	540

CLOSED LIGHT INDUSTRIAL PALLET WITH RUNNERS


LIGHTWEIGHT BASIC 1210-C3



Options

- ✓ Color personalizable
- ✓ Logo serigrafiado
- ✓ Logo grabado
- ✓ Topes personalizables o sin topes
- ✓ Etiquetas
- ✓ Otros materiales disponibles

Technical drawing

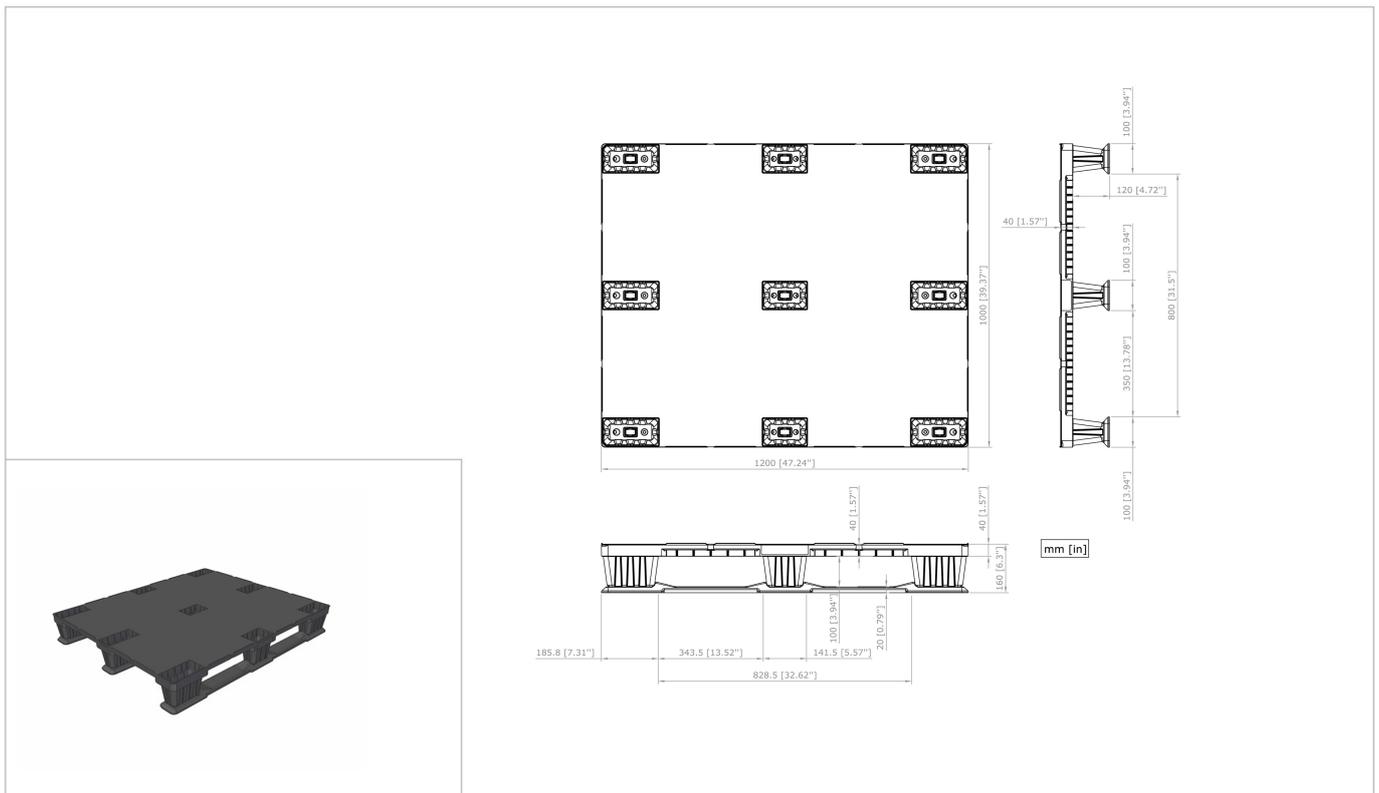

Iconography legend



-20°/40°C [-4°/104°F]



0°/40°C [32°/104°F]



Closed



4-ways



Rims for boxes

Recommendations for use

- ✓ Do not stack more than 48 pallets, which equates to a height of 7,68 m of empty pallets.
- ✓ Do not handle stacks of more than 18 empty pallets.
- ✓ Once stacked in height check that they are properly fitted.

*1 The values indicated are approximate and are based on both practical experiences and ISO 8611 tests with a uniformly distributed standard load, distributed all over the pallet surface, duly consolidated, compact and stable and at ambient temperature (20°C [68°F]) for a specific time. Different load conditions produce different values that have to be checked at the customer's request. Any deterioration or breakage in the pallet may vary these results.

*2 Due to the characteristics of the materials recycled, the dimensions and the weight of the pallets may present certain tolerances. Dimensional tolerances according to DIN ISO 2768-V and weight tolerances: +/- 4%. Except for references of the FLAT category: +/- 3%.

- Nortpalet reserves the right to modify any information herein indicated without prior notice.

- The specifications can be affected in case of alteration of the product with parts and / or materials different from those approved by the Nortpalet quality department. Any warranty, specification or liability on the part of Nortpalet will be terminated in case of modification of the product with spare parts not supplied by Nortpalet.