


# CLOSED LIGHT NESTABLE EURO PALLET

LIGHTWEIGHT BASIC 1208-C9

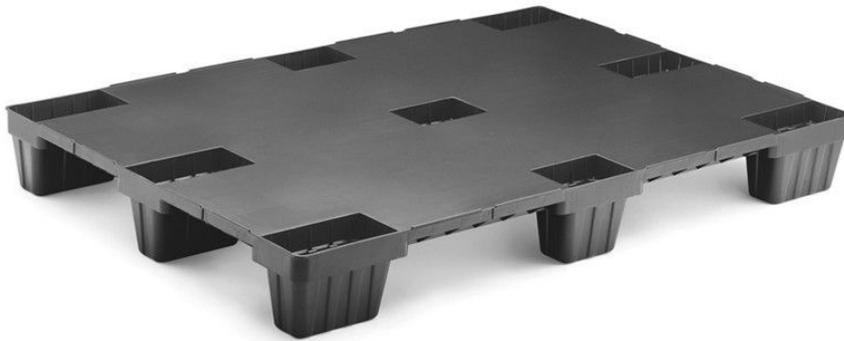

Closed and plain surface Euro pallet. Ideal equipment to be washed after its use being the closed pallet model of these dimensions with less weight. Suitable for reuse in closed circuits. It allows the incorporation of runners as option becoming the BASIC 1208-C3 version.

## Advantages

- ✓ Ranura especial para flejado
- ✓ Perímetro anti-impacto
- ✓ Superficie antideslizante
- ✓ Facilidad de extracción del palet sobre torre
- ✓ Esquinas preparadas para un óptimo retráctilado
- ✓ Superficie completamente plana y sin orificios

## Technical data

Ref	Materials	Weigh	Measures	Static load*1	Dynamic load*1	Rack load*1
BASIC 1208-C9	rPE rPP	6.50 kg [14.30 lb]	1200x800x140mm [47.20x31.50x5.50"]	2000 kg [4410 lb]	1000 kg [2210 lb]	- kg [- lb]

## Logistic data

Ref	20' DV	40' DV	40 HC	45' PWHC	Tauliner	Mega	Jumbo
BASIC 1208-C9	550	1250	1500	1980	1980	2145	2470

# CLOSED LIGHT NESTABLE EURO PALLET


LIGHTWEIGHT BASIC 1208-C9



## Options

- ✓ Color personalizable
- ✓ Logo serigrafiado
- ✓ Logo grabado
- ✓ Topes personalizables o sin topes
- ✓ Etiquetas
- ✓ Otros materiales disponibles

## Technical drawing

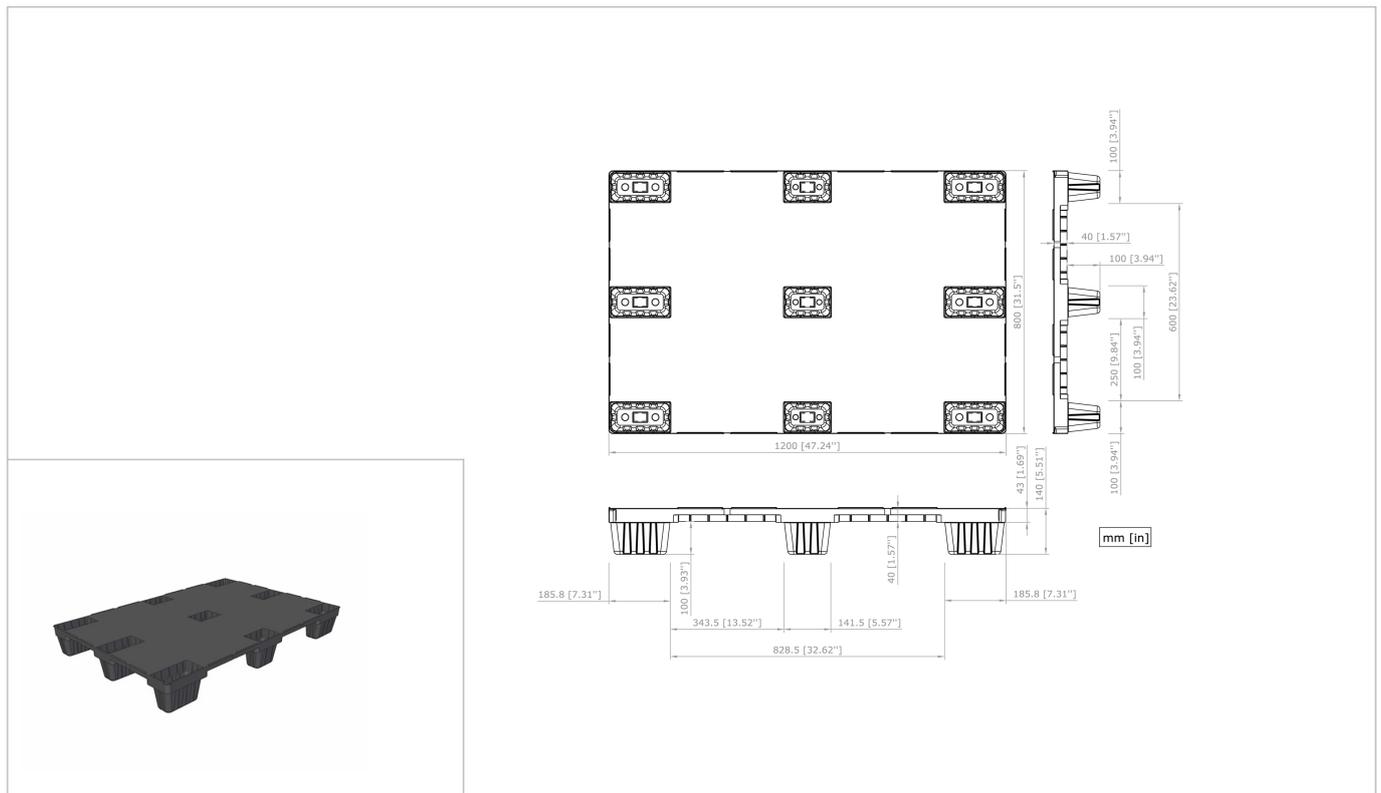

## Iconography legend

- 20°/40°C [-4°/104°F]
- 0°/40°C [32°/104°F]
- Closed
- Nestable
- 4-ways
- Rims for boxes

## Recommendations for use

- ✓ Do not stack more than 90 pallets, which equates to a height of 4 m of empty pallets.
- ✓ Do not handle stacks of more than 40 empty pallets.
- ✓ Once stacked in height check that they are properly fitted.

\*1 The values indicated are approximate and are based on both practical experiences and ISO 8611 tests with a uniformly distributed standard load, distributed all over the pallet surface, duly consolidated, compact and stable and at ambient temperature (20°C [68°F]) for a specific time. Different load conditions produce different values that have to be checked at the customer's request. Any deterioration or breakage in the pallet may vary these results.

\*2 Due to the characteristics of the materials recycled, the dimensions and the weight of the pallets may present certain tolerances. Dimensional tolerances according to DIN ISO 2768-V and weight tolerances: +/- 4%. Except for references of the FLAT category: +/- 3%.

- Nortpalet reserves the right to modify any information herein indicated without prior notice.

- The specifications can be affected in case of alteration of the product with parts and / or materials different from those approved by the Nortpalet quality department. Any warranty, specification or liability on the part of Nortpalet will be terminated in case of modification of the product with spare parts not supplied by Nortpalet.