


CLOSED ULTRA LIGHT NESTABLE INDUSTRIAL PALLET

LIGHTWEIGHT ULTRA BASIC 1210-C9



Industrial plastic pallet with closed and smooth deck, the most economical of the whole range with an optimized height and weight . This pallet is ideal for cleaning after use. Suitable for the re-use of goods in closed circuits.

Advantages

- ✓ Altura optimizada
- ✓ Ultra ligero
- ✓ Superficie completamente plana y sin orificios
- ✓ Fácil lavado
- ✓ Apto para transporte aéreo

Technical data

Ref	Materials	Weigh	Measures	Static load*1	Dynamic load*1	Rack load*1
ULTRA BASIC 1210-C9		6.20 kg [13.70 lb]	1200x1000x130mm [47.20x39.40x5.10"]	1000 kg [2210 lb]	400 kg [880 lb]	- kg [- lb]

Logistic data

Ref	20' DV	40' DV	40 HC	45' PWHC	Tauliner	Mega	Jumbo
ULTRA BASIC 1210-C9	720	1512	1722	2132	2132	2418	2790

CLOSED ULTRA LIGHT NESTABLE INDUSTRIAL PALLET


LIGHTWEIGHT ULTRA BASIC 1210-C9



Options

- ✓ Color personalizable
- ✓ Logo serigrafiado
- ✓ Logo grabado
- ✓ Topes personalizables o sin topes
- ✓ Etiquetas
- ✓ Otros materiales disponibles

Technical drawing

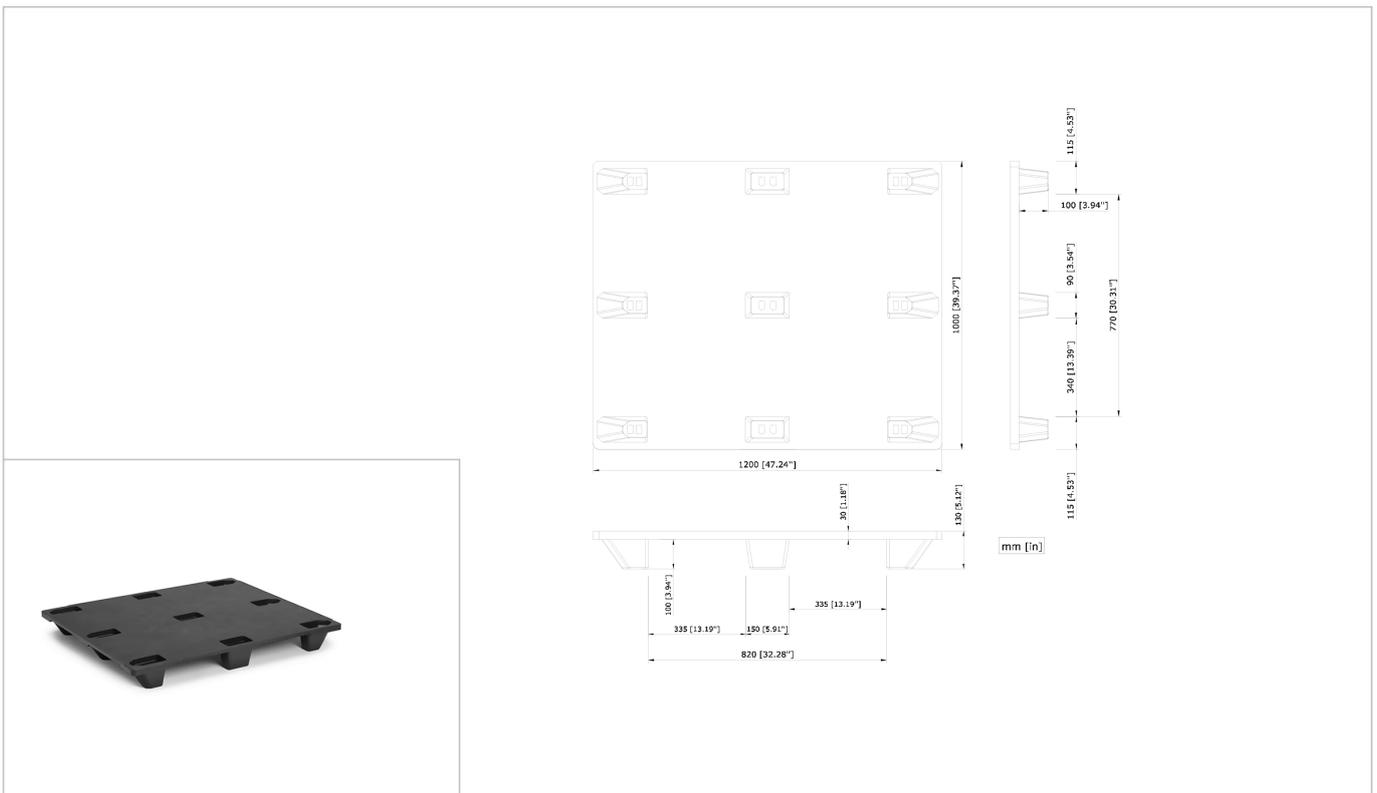

Iconography legend



0°/40°C [32°/104°F]



Closed



Nestable



4-ways



Tilted feet

Recommendations for use

- ✓ Do not stack more than 125 pallets, which equates to a height of 4 M when empty.
- ✓ Do not handle blocks more 90 empty pallets.
- ✓ Once Stacked, check that they are properly fitted.

*1 The values indicated are approximate and are based on both practical experiences and ISO 8611 tests with a uniformly distributed standard load, distributed all over the pallet surface, duly consolidated, compact and stable and at ambient temperature (20°C [68°F]) for a specific time. Different load conditions produce different values that have to be checked at the customer's request. Any deterioration or breakage in the pallet may vary these results.

*2 Due to the characteristics of the materials recycled, the dimensions and the weight of the pallets may present certain tolerances. Dimensional tolerances according to DIN ISO 2768-V and weight tolerances: +/- 4%. Except for references of the FLAT category: +/- 3%.

- Nortpalet reserves the right to modify any information herein indicated without prior notice.

- The specifications can be affected in case of alteration of the product with parts and / or materials different from those approved by the Nortpalet quality department. Any warranty, specification or liability on the part of Nortpalet will be terminated in case of modification of the product with spare parts not supplied by Nortpalet.