

H1 EURO PALLET

HYGIENIC CLEAN 1208-H1







With more than 20 years in the market, the H1 pallet is widely used equipment throughout Europe in numerous applications and industries, being especially recognized for its extensive strength and durability. It is ideal equipment for reuse applications in hygienic environments.








Advantages

- ✓ Modelo Certificado
- ✓ Especialmente diseñado para la industria cárnica y de alimentación
- ✓ Compatible con cajas euronorma
- ✓ Patines soldados cerrados lisos para mejor comportamiento e higiene

Technical data

Ref	Materials	Weigh	Measures	 Static load*1	 Dynamic load*1	 Rack load*1
CLEAN 1208-H1		18.00 kg [31.70 lb]	1200x800x160mm [47.20x31.50x6.30"]	5000 kg [11025 lb]	1250 kg [2755 lb]	1000 kg [2210 lb]

Logistic data

Ref	 20' DV	 40' DV	 40 HC	 45' PWHC	 Tauliner	 Mega	 Jumbo
CLEAN 1208-H1	143	325	400	528	528	594	684


H1 EURO PALLET

HYGIENIC CLEAN 1208-H1

Options

- ✓ Color personalizable
- ✓ Logo serigrafiado
- ✓ Logo grabado
- ✓ Topes personalizables o sin topes
- ✓ Etiquetas / RFID

Technical drawing

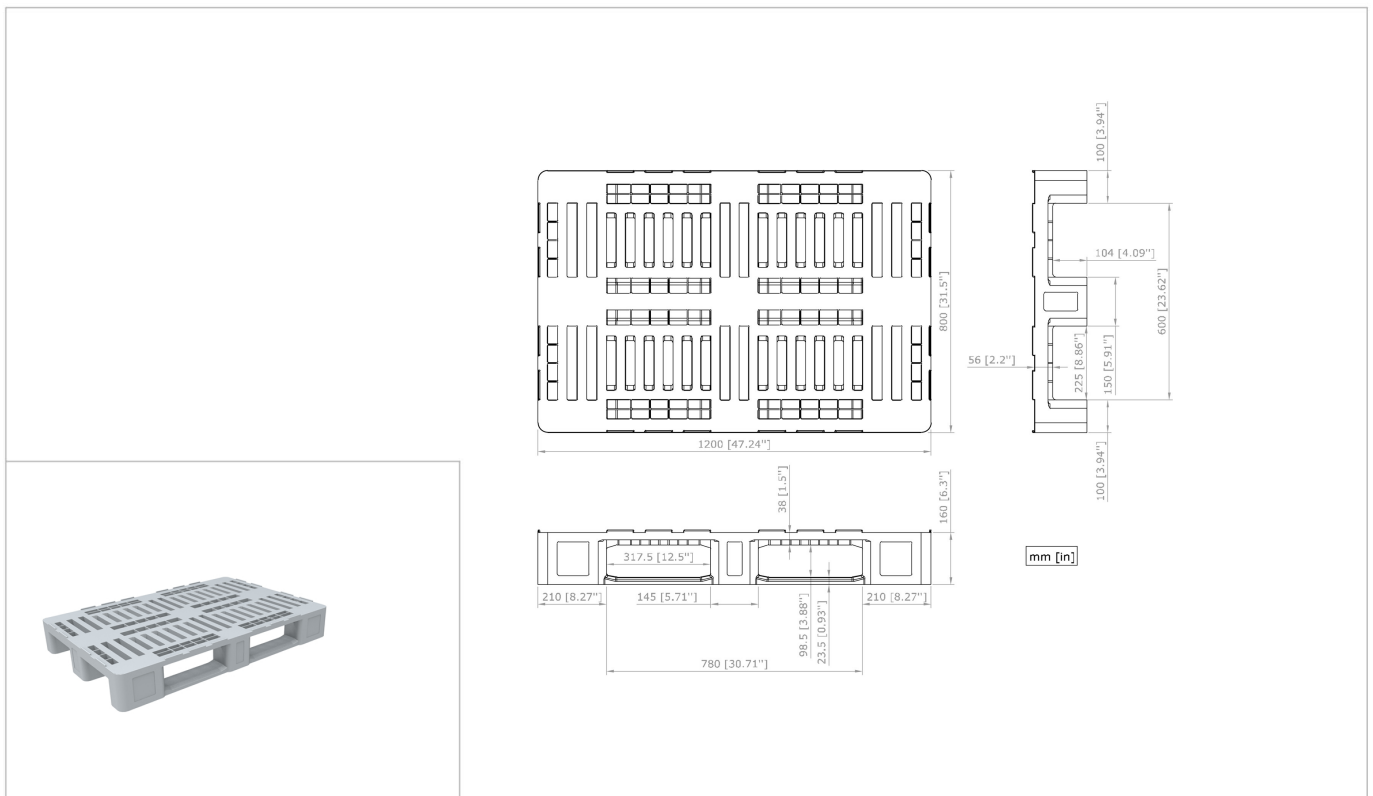

Iconography legend



-30°/40°C [32°/104°F]



open



4-ways



Rims for boxes

Recommendations for use

- ✓ Do not stack more than 48 pallets, which is equivalent to a height of 7.7 m when empty
- ✓ Do not handle stacks of more than 27 empty pallets.
- ✓ Once stacked in height check that they are properly fitted.

*1 The values indicated are approximate and are based on both practical experiences and ISO 8611 tests with a uniformly distributed standard load, distributed all over the pallet surface, duly consolidated, compact and stable and at ambient temperature (20°C [68°F]) for a specific time. Different load conditions produce different values that have to be checked at the customer's request. Any deterioration or breakage in the pallet may vary these results.

*2 Due to the characteristics of the materials recycled, the dimensions and the weight of the pallets may present certain tolerances. Dimensional tolerances according to DIN ISO 2768-V and weight tolerances: +/- 4%. Except for references of the FLAT category: +/- 3%.

- Nortpalet reserves the right to modify any information herein indicated without prior notice.

- The specifications can be affected in case of alteration of the product with parts and / or materials different from those approved by the Nortpalet quality department. Any warranty, specification or liability on the part of Nortpalet will be terminated in case of modification of the product with spare parts not supplied by Nortpalet.