

HEAVY DUTY REINFORCED REPAIRABLE EURO PALLET

HEAVY DUTY EXPERT PRO 1208-O3



Ideal equipment for the highest specifications of rack load thanks to its metallic reinforcements. The runners are repairable, allowing their replacement in case of breakage without having to discard the equipment. Ideal for high reuse in all types of logistics circuits.

Advantages

- ✓ Apto Rack
- ✓ Perímetro anti-impacto
- ✓ Esquinas preparadas para un óptimo retráctilado
- ✓ Patines reforzados para caminos de rodillos
- ✓ Cámaras amortiguadoras de impacto en los tacos

Technical data

Ref	Materials	Weight	Measures	Static load*1	Dynamic load*1	Rack load*1
EXPERT PRO 1208-O3	rPE rPP	20.50 kg [45.20 lb]	1200x800x160mm [47.20x31.50x6.30"]	7500 kg [16535 lb]	1750 kg [3860 lb]	1200 kg [2645 lb]

Logistic data

Ref	20' DV	40' DV	40 HC	45' PWHC	Tauliner	Mega	Jumbo
EXPERT PRO 1208-O3	143	325	400	528	528	594	684

HEAVY DUTY REINFORCED REPAIRABLE EURO PALLET


HEAVY DUTY EXPERT PRO 1208-03



Options

- ✓ Color personalizable
- ✓ Etiqueta RFID
- ✓ Logo serigrafiado
- ✓ Logo grabado
- ✓ Topes personalizables o sin topes
- ✓ Otros materiales disponibles

Technical drawing

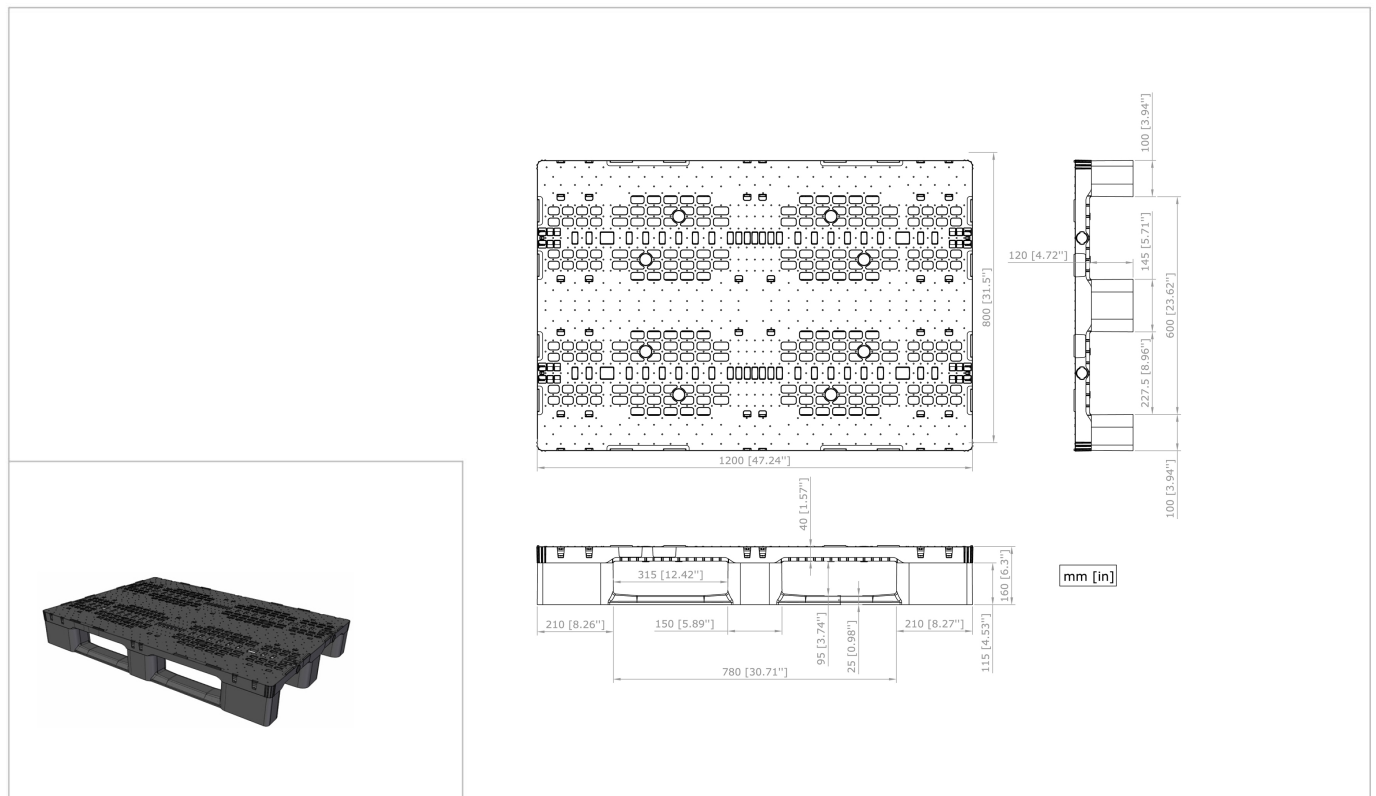

Iconography legend

- 20°/40°C [-4°/104°F]
- 0°/40°C [32°/104°F]
- open
- 4-ways
- Rims for boxes
- Repairable
- Reinforced
- Upper rubbers

Recommendations for use

- ✓ Do not stack more than 48 pallets, which is equivalent to a height of 7.7 m when empty
- ✓ Do not handle stacks of more than 27 empty pallets.
- ✓ Once stacked in height check that they are properly fitted.

*1 The values indicated are approximate and are based on both practical experiences and ISO 8611 tests with a uniformly distributed standard load, distributed all over the pallet surface, duly consolidated, compact and stable and at ambient temperature (20°C [68°F]) for a specific time. Different load conditions produce different values that have to be checked at the customer's request. Any deterioration or breakage in the pallet may vary these results.

*2 Due to the characteristics of the materials recycled, the dimensions and the weight of the pallets may present certain tolerances. Dimensional tolerances according to DIN ISO 2768-V and weight tolerances: +/- 4%. Except for references of the FLAT category: +/- 3%.

- Nortpalet reserves the right to modify any information herein indicated without prior notice.

- The specifications can be affected in case of alteration of the product with parts and / or materials different from those approved by the Nortpalet quality department. Any warranty, specification or liability on the part of Nortpalet will be terminated in case of modification of the product with spare parts not supplied by Nortpalet.