



HEAVY DUTY REPAIRABLE EURO PALLET

HEAVY DUTY EXPERT 1208-O3

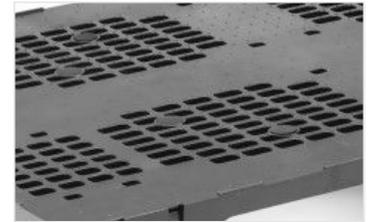

Ideal equipment for all categories of products, applications and sectors that require high load specifications and a long life cycle. The runners are repairable, allowing their replacement in case of breakage without having to discard the equipment. Ideal for high reuse in the most demanding environments.

Advantages

- ✓ Apto Rack
- ✓ Perímetro anti-impacto
- ✓ Esquinas preparadas para un óptimo retráctilado
- ✓ Patines reforzados para caminos de rodillos
- ✓ Cámaras amortiguadoras de impacto en los tacos

Technical data

| Ref | Materials | Weigh | Measures | Static load*1 | Dynamic load*1 | Rack load*1 |
|----------------|-----------|---------------------|------------------------------------|--------------------|-------------------|-------------------|
| EXPERT 1208-O3 | | 18.50 kg [40.80 lb] | 1200x800x160mm [47.20x31.50x6.30"] | 6500 kg [14330 lb] | 1500 kg [3310 lb] | 1000 kg [2210 lb] |

Logistic data

| Ref | 20' DV | 40' DV | 40 HC | 45' PWHC | Tauliner | Mega | Jumbo |
|----------------|--------|--------|-------|----------|----------|------|-------|
| EXPERT 1208-O3 | 143 | 325 | 400 | 528 | 528 | 594 | 684 |

HEAVY DUTY REPAIRABLE EURO PALLET


HEAVY DUTY EXPERT 1208-03



Options

- ✓ Color personalizable
- ✓ Etiqueta RFID
- ✓ Logo serigrafiado
- ✓ Logo grabado
- ✓ Topes personalizables o sin topes
- ✓ Otros materiales disponibles

Technical drawing

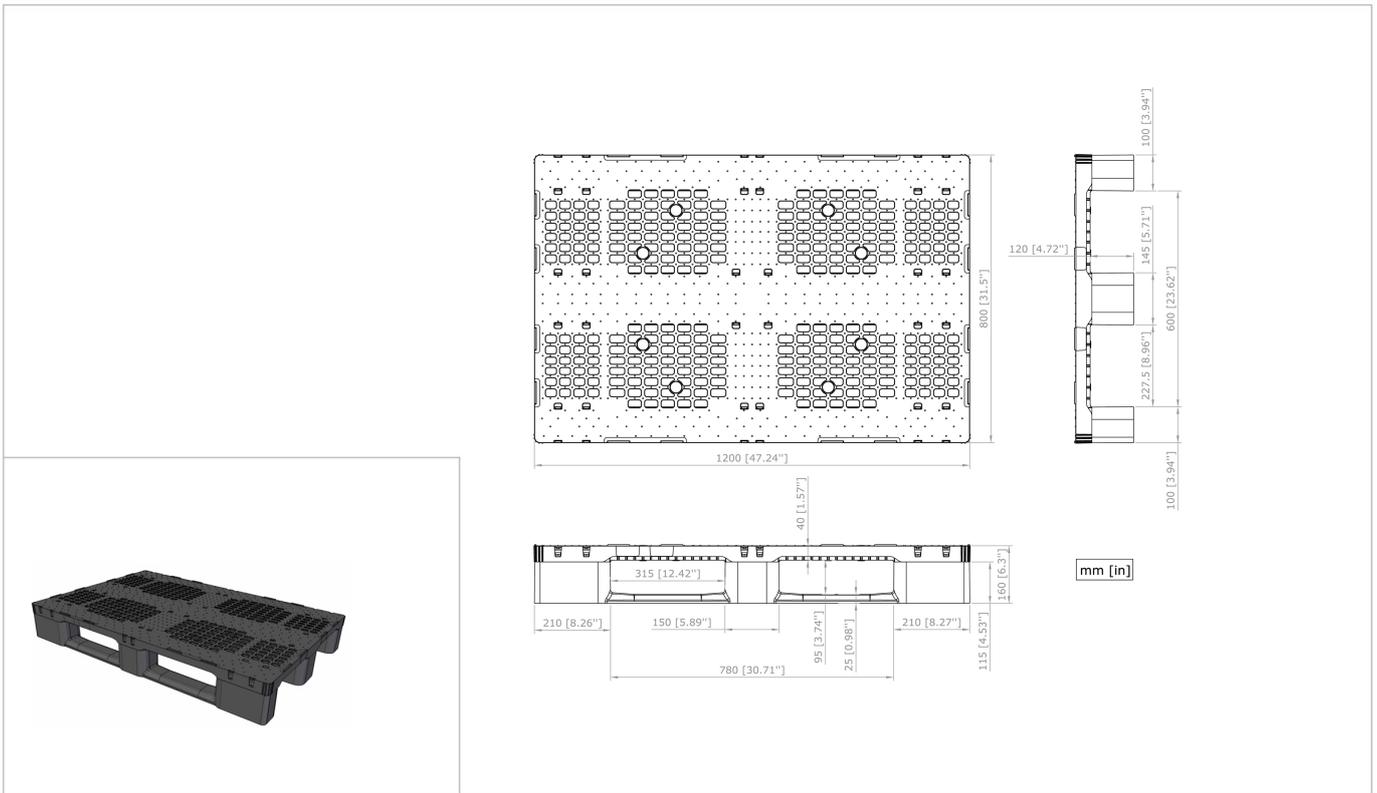

Iconography legend

- 20°/40°C [-4°/104°F]
- 0°/40°C [32°/104°F]
- open
- 4-ways
- Rims for boxes
- Repairable
- Upper rubbers

Recommendations for use

- ✓ Do not stack more than 48 pallets, which is equivalent to a height of 7.7 m when empty
- ✓ Do not handle stacks of more than 27 empty pallets.
- ✓ Once stacked in height check that they are properly fitted.

*1 The values indicated are approximate and are based on both practical experiences and ISO 8611 tests with a uniformly distributed standard load, distributed all over the pallet surface, duly consolidated, compact and stable and at ambient temperature (20°C [68°F]) for a specific time. Different load conditions produce different values that have to be checked at the customer's request. Any deterioration or breakage in the pallet may vary these results.

*2 Due to the characteristics of the materials recycled, the dimensions and the weight of the pallets may present certain tolerances. Dimensional tolerances according to DIN ISO 2768-V and weight tolerances: +/- 4%. Except for references of the FLAT category: +/- 3%.

- Nortpalet reserves the right to modify any information herein indicated without prior notice.

- The specifications can be affected in case of alteration of the product with parts and / or materials different from those approved by the Nortpalet quality department. Any warranty, specification or liability on the part of Nortpalet will be terminated in case of modification of the product with spare parts not supplied by Nortpalet.