

ONE QUARTER NESTABLE PALLET

LIGHTWEIGHT BASIC 0604-O4



Display pallet ideal for promotion of products on the shelves, improving the promotion and visibility of the brand and helping to increase sales. Thanks to the arrangement of its plugs this pallet can be handled by most maintenance equipment.

Advantages



Esquinas preparadas para un óptimo retractorilado



Altura optimizada



Palet ideal para acciones promocionales y uso con Display Box

Technical data

| Ref | Materials | Weigh | Measures |  Static load*1 |  Dynamic load*1 |  Rack load*1 |
|---------------|---|-------------------|-----------------------------------|---|--|---|
| BASIC 0604-O4 |  | 1.35 kg [3.00 lb] | 600x400x130mm [23.60x15.70x5.10"] | 500 kg [1 105 lb] | 350 kg [770 lb] | - kg [- lb] |

Logistic data


| Ref |  20' DV |  40' DV |  40 HC |  45' PWHC |  Tauliner |  Mega |  Jumbo |
|---------------|--|--|---|--|---|--|---|
| BASIC 0604-O4 | 3500 | 7700 | 9130 | 10956 | 10956 | 12276 | 14136 |

ONE QUARTER NESTABLE PALLET

LIGHTWEIGHT BASIC 0604-O4

Options

Technical drawing

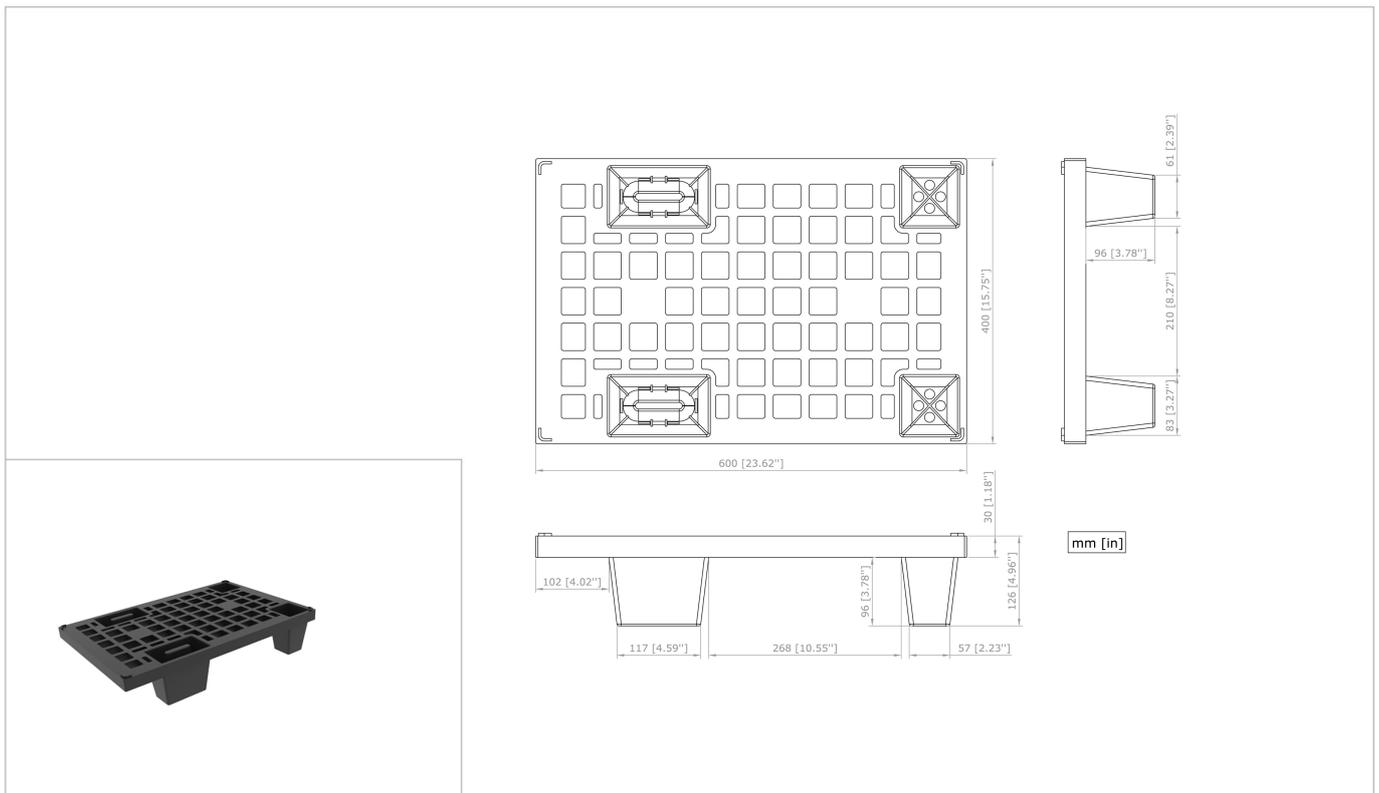

Iconography legend



0°/40°C [32°/104°F]



open



Nestable

Recommendations for use

- ✓ Do not stack more than 80 pallets, which equates to a height of 3 m of empty pallets.
- ✓ Do not handle stacks of more than 70 empty pallets.
- ✓ Once stacked in height check that they are properly fitted.

*1 The values indicated are approximate and are based on both practical experiences and ISO 8611 tests with a uniformly distributed standard load, distributed all over the pallet surface, duly consolidated, compact and stable and at ambient temperature (20°C [68°F]) for a specific time. Different load conditions produce different values that have to be checked at the customer's request. Any deterioration or breakage in the pallet may vary these results.

*2 Due to the characteristics of the materials recycled, the dimensions and the weight of the pallets may present certain tolerances. Dimensional tolerances according to DIN ISO 2768-V and weight tolerances: +/- 4%. Except for references of the FLAT category: +/- 3%.

- Nortpalet reserves the right to modify any information herein indicated without prior notice.

- The specifications can be affected in case of alteration of the product with parts and / or materials different from those approved by the Nortpalet quality department. Any warranty, specification or liability on the part of Nortpalet will be terminated in case of modification of the product with spare parts not supplied by Nortpalet.