


# LOW HEIGHT REINFORCED REPAIRABLE HALF PALLET

MEDIUM LOGIC PRO 0806-03

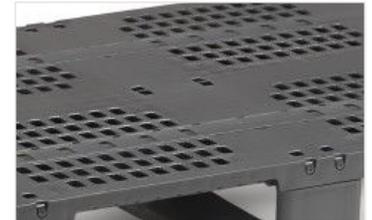

Display pallet suitable for rack applications, standard and with height optimized that allows adding more product for certain references when there is a limitation of height increasing the efficiency of the logistics operation. Optimizes empty space up to 12% compared to conventional pallet.

## Advantages

- ✓ Apto Rack
- ✓ Perímetro anti-impacto
- ✓ Superficie antideslizante
- ✓ Esquinas preparadas para un óptimo retráctilado
- ✓ Altura optimizada

## Technical data

Ref	Materials	Weigh	Measures	Static load*1	Dynamic load*1	Rack load*1
LOGIC PRO 0806-03		8.40 kg [18.50 lb]	800x600x140mm [31.50x23.60x5.50"]	1500 kg [3310 lb]	500 kg [1105 lb]	500 kg [1105 lb]

## Logistic data

Ref	20' DV	40' DV	40 HC	45' PWHC	Tauliner	Mega	Jumbo
LOGIC PRO 0806-03	375	825	990	1188	1188	1320	1520

# LOW HEIGHT REINFORCED REPAIRABLE HALF PALLET


MEDIUM LOGIC PRO 0806-03



## Options

- ✓ Color personalizable
- ✓ Etiqueta RFID
- ✓ Logo serigrafiado
- ✓ Logo grabado
- ✓ Topes personalizables o sin topes
- ✓ Otros materiales disponibles

## Technical drawing

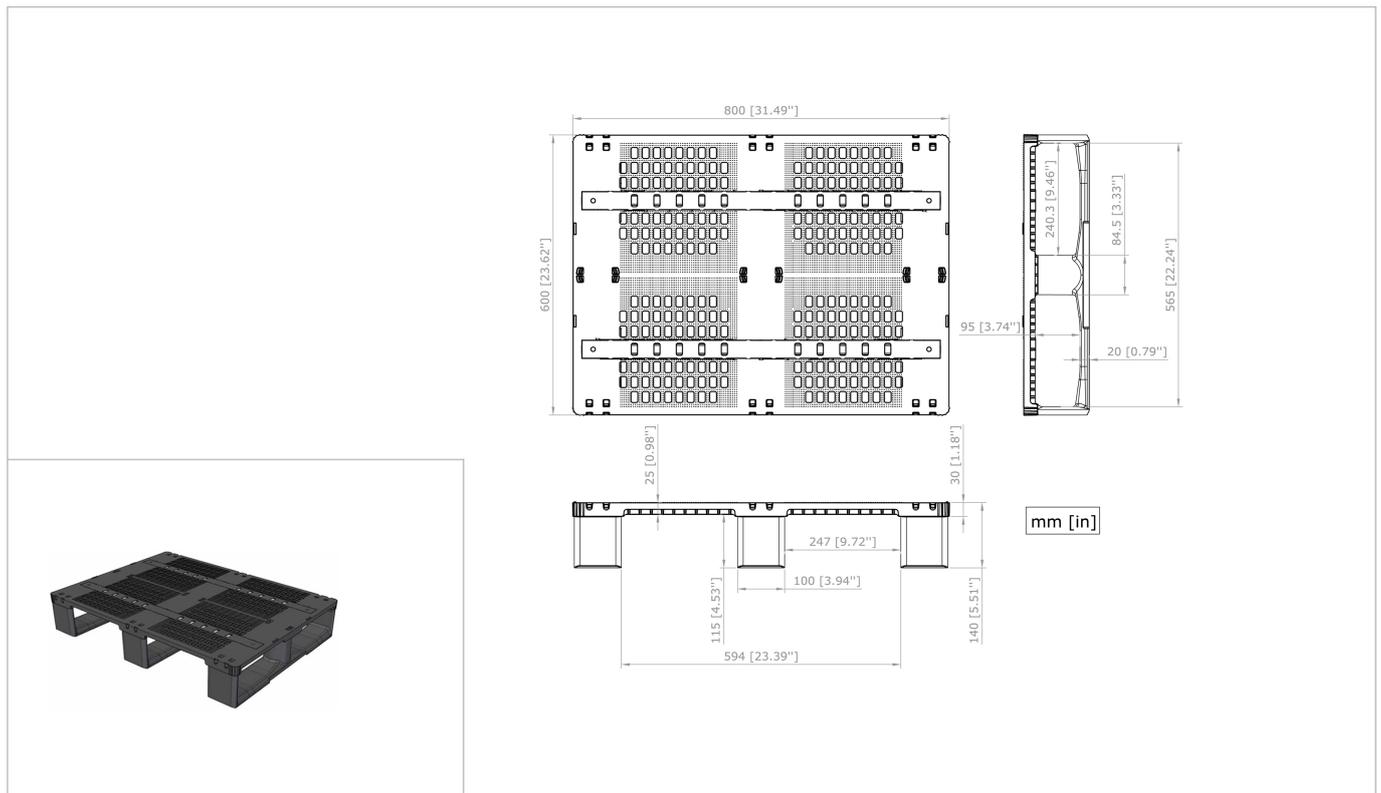

## Iconography legend

- 0°/40°C [32°/104°F]
- open
- 4-ways
- Rims for boxes
- Repairable
- Reinforced

## Recommendations for use

- ✓ Do not stack more than 54 pallets, which is equivalent to a height of 7.7 m when empty.
- ✓ Do not handle stacks of more than 32 empty pallets.
- ✓ Once stacked in height check that they are properly fitted.

\*1 The values indicated are approximate and are based on both practical experiences and ISO 8611 tests with a uniformly distributed standard load, distributed all over the pallet surface, duly consolidated, compact and stable and at ambient temperature (20°C [68°F]) for a specific time. Different load conditions produce different values that have to be checked at the customer's request. Any deterioration or breakage in the pallet may vary these results.

\*2 Due to the characteristics of the materials recycled, the dimensions and the weight of the pallets may present certain tolerances. Dimensional tolerances according to DIN ISO 2768-V and weight tolerances: +/- 4%. Except for references of the FLAT category: +/- 3%.

- Nortpalet reserves the right to modify any information herein indicated without prior notice.

- The specifications can be affected in case of alteration of the product with parts and / or materials different from those approved by the Nortpalet quality department. Any warranty, specification or liability on the part of Nortpalet will be terminated in case of modification of the product with spare parts not supplied by Nortpalet.