



# MONOBLOC 1300X1100 PALLET WITH 3 RUNNERS

MEDIUM LOGIC 1311-G3








Pallet of special dimensions 1300x1100 in one piece, ideal for reuse applications. Suitable for moderate loads in all types of uses and sectors. Compatible with all standard handling equipment.








## Advantages

-  Apto Rack
-  Perímetro anti-impacto
-  Esquinas preparadas para un óptimo retráctilado
-  Altura optimizada

## Technical data

Ref	Materials	Weigh	Measures	 Static load*1	 Dynamic load*1	 Rack load*1
LOGIC 1311-G3	 	13.60 kg [30.00 lb]	1300x1100x150mm [51.20x43.30x5.90"]	5000 kg [11025 lb]	1250 kg [2755 lb]	500 kg [1105 lb]

## Logistic data

Ref	 20' DV	 40' DV	 40 HC	 45' PWHC	 Tauliner	 Mega	 Jumbo
LOGIC 1311-G3	112	252	306	340	340	380	418

# MONOBLOC 1300X1100 PALLET WITH 3 RUNNERS


MEDIUM LOGIC 1311-G3



## Options

- ✓ Color personalizable
- ✓ Etiqueta RFID
- ✓ Logo serigrafiado
- ✓ Logo grabado
- ✓ Topes personalizables o sin topes
- ✓ Otros materiales disponibles

## Technical drawing

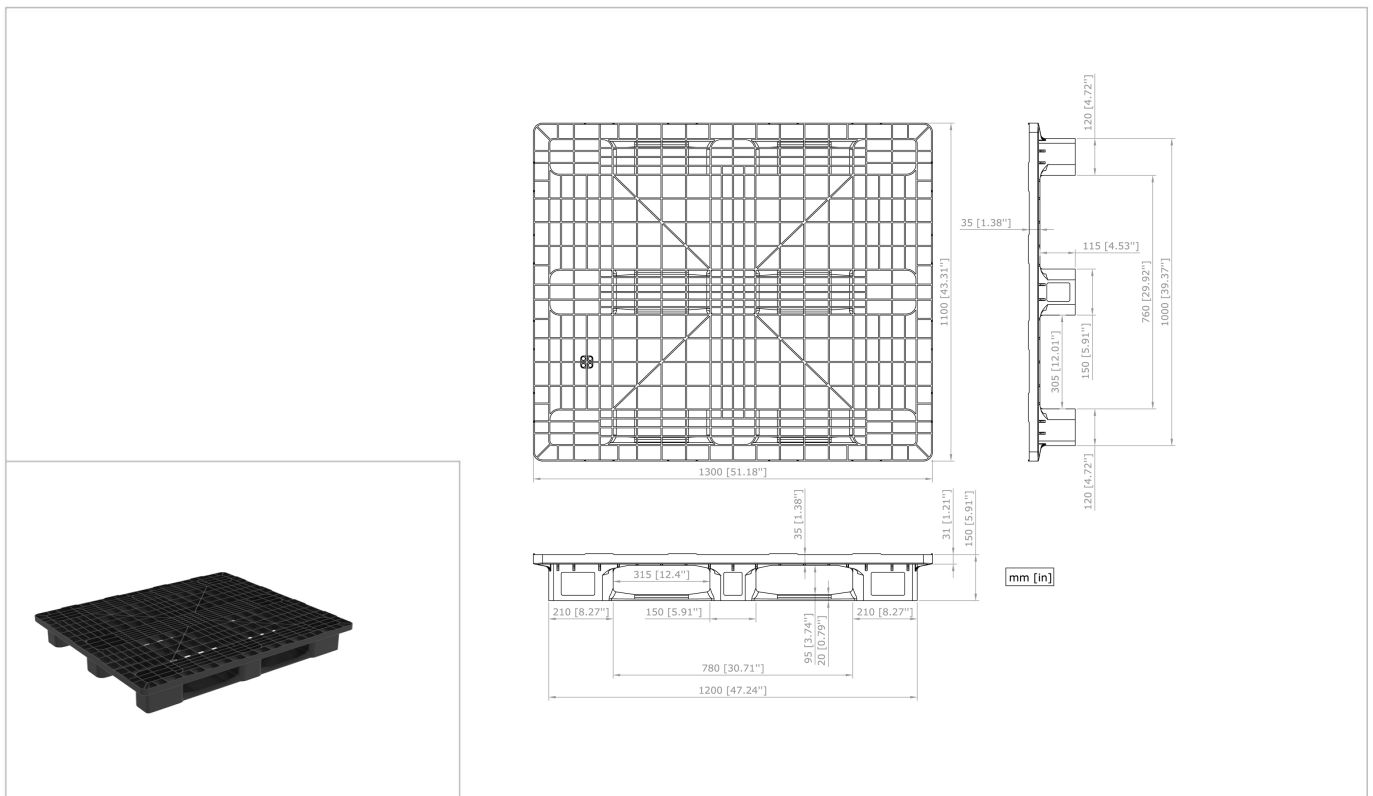

## Iconography legend



-20°/40°C [-4°/104°F]



0°/40°C [32°/104°F]



open



4-ways



Rims for boxes

## Recommendations for use

- ✓ Do not stack more than 52 pallets, which is equivalent to a height of 7,7 m when empty.
- ✓ Do not handle stacks of more than 29 empty pallets.
- ✓ Once stacked in height check that they are properly fitted.

\*1 The values indicated are approximate and are based on both practical experiences and ISO 8611 tests with a uniformly distributed standard load, distributed all over the pallet surface, duly consolidated, compact and stable and at ambient temperature (20°C [68°F]) for a specific time. Different load conditions produce different values that have to be checked at the customer's request. Any deterioration or breakage in the pallet may vary these results.

\*2 Due to the characteristics of the materials recycled, the dimensions and the weight of the pallets may present certain tolerances. Dimensional tolerances according to DIN ISO 2768-V and weight tolerances: +/- 4%. Except for references of the FLAT category: +/- 3%.

- Nortpalet reserves the right to modify any information herein indicated without prior notice.

- The specifications can be affected in case of alteration of the product with parts and / or materials different from those approved by the Nortpalet quality department. Any warranty, specification or liability on the part of Nortpalet will be terminated in case of modification of the product with spare parts not supplied by Nortpalet.