


# REINFORCED HYGIENIC INDUSTRIAL PALET WITH 5 RUNNERS

HYGIENIC CLEAN PRO 1210-C5

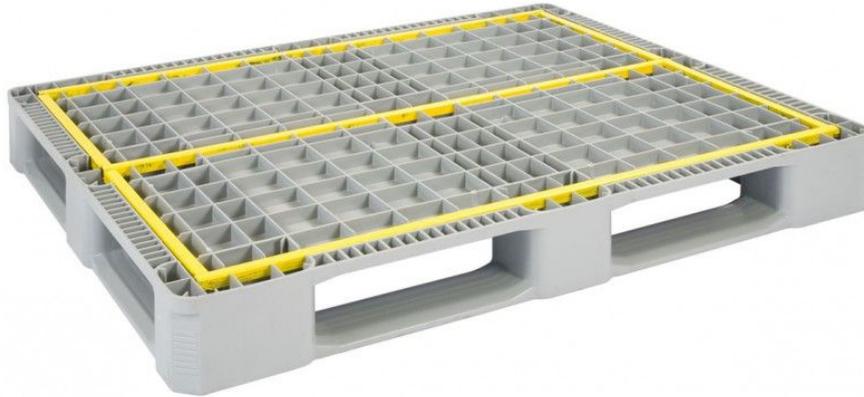

Hygienic 5-runners industrial pallet ideal for environments requiring maximum hygiene with the maximum rack load performance thanks to its 5 metallic reinforcements. Completely plain and closed equipment that facilitates cleaning after each reuse. Ideal solution for white room applications.

## Advantages

- ✓ Apto Rack
- ✓ Perímetro anti-impacto
- ✓ Esquinas preparadas para un óptimo retráctilado
- ✓ Superficie Cerrada

## Technical data

Ref	Materials	Weigh	Measures	Static load*1	Dynamic load*1	Rack load*1
CLEAN PRO 1210-C5	PE	28.00 kg [61.70 lb]	1200x1000x160mm [47.20x39.40x6.30"]	7500 kg [16535 lb]	2000 kg [4410 lb]	1500 kg [3310 lb]

## Logistic data

Ref	20' DV	40' DV	40 HC	45' PWHC	Tauliner	Mega	Jumbo
CLEAN PRO 1210-C5	130	273	336	416	416	468	540

# REINFORCED HYGIENIC INDUSTRIAL PALET WITH 5 RUNNERS


HYGIENIC CLEAN PRO 1210-C5



## Options

- ✓ Color personalizable
- ✓ Logo serigrafiado
- ✓ Logo grabado
- ✓ Topes personalizables o sin topes
- ✓ Etiquetas / RFID

## Technical drawing

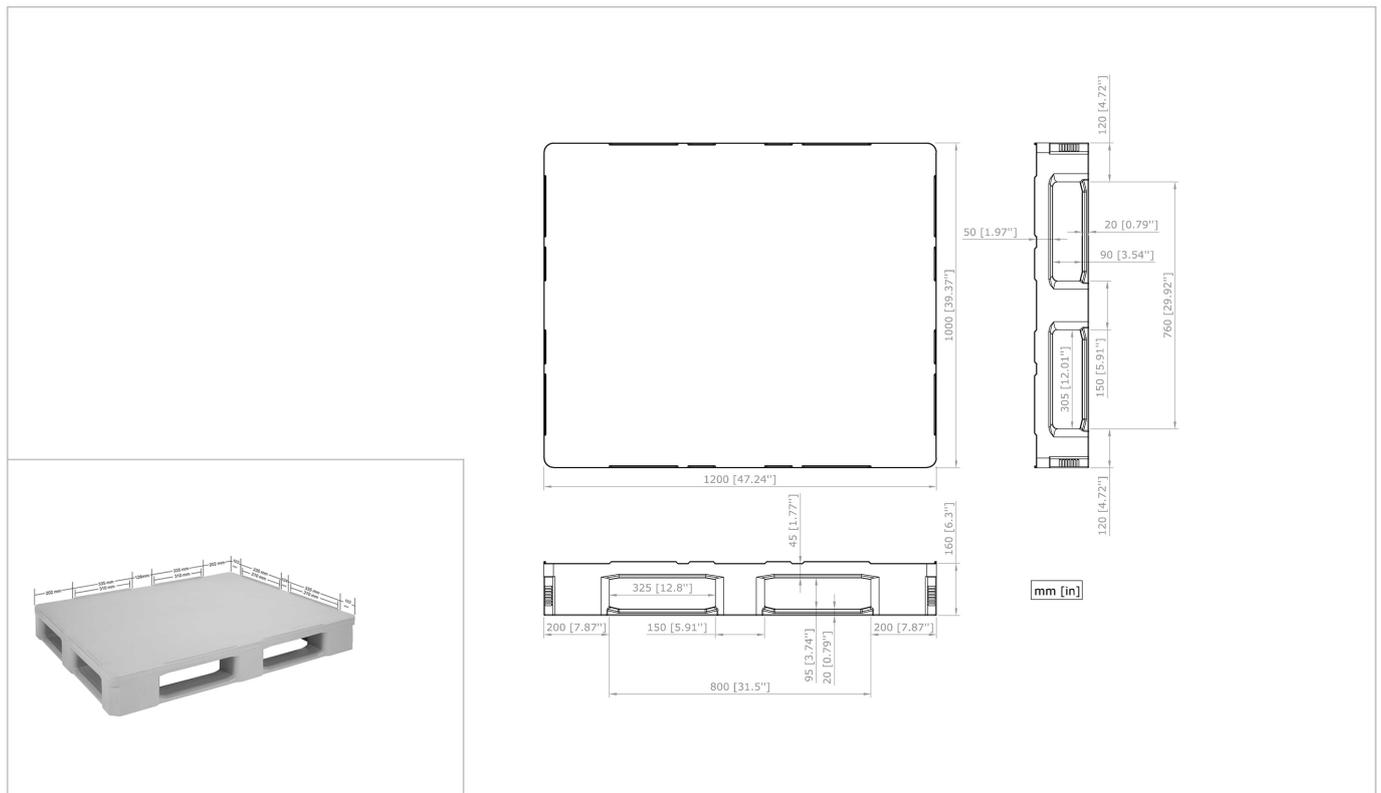

## Iconography legend



-30°/40°C [32°/104°F]



Closed



Rims for boxes



Reinforced

## Recommendations for use

- ✓ Do not stack more than 48 pallets, which is equivalent to a height of 7.7 m when empty
- ✓ Do not handle stacks of more than 27 empty pallets.
- ✓ Once stacked in height check that they are properly fitted.

\*1 The values indicated are approximate and are based on both practical experiences and ISO 8611 tests with a uniformly distributed standard load, distributed all over the pallet surface, duly consolidated, compact and stable and at ambient temperature (20°C [68°F]) for a specific time. Different load conditions produce different values that have to be checked at the customer's request. Any deterioration or breakage in the pallet may vary these results.

\*2 Due to the characteristics of the materials recycled, the dimensions and the weight of the pallets may present certain tolerances. Dimensional tolerances according to DIN ISO 2768-V and weight tolerances: +/- 4%. Except for references of the FLAT category: +/- 3%.

- Nortpalet reserves the right to modify any information herein indicated without prior notice.

- The specifications can be affected in case of alteration of the product with parts and / or materials different from those approved by the Nortpalet quality department. Any warranty, specification or liability on the part of Nortpalet will be terminated in case of modification of the product with spare parts not supplied by Nortpalet.