


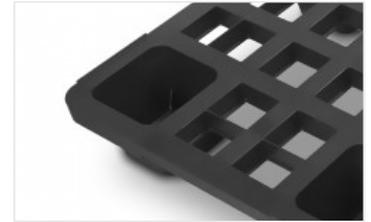


SQUARED NESTABLE PALLET 1140X1140 MM

LIGHTWEIGHT BASIC 1140-O9

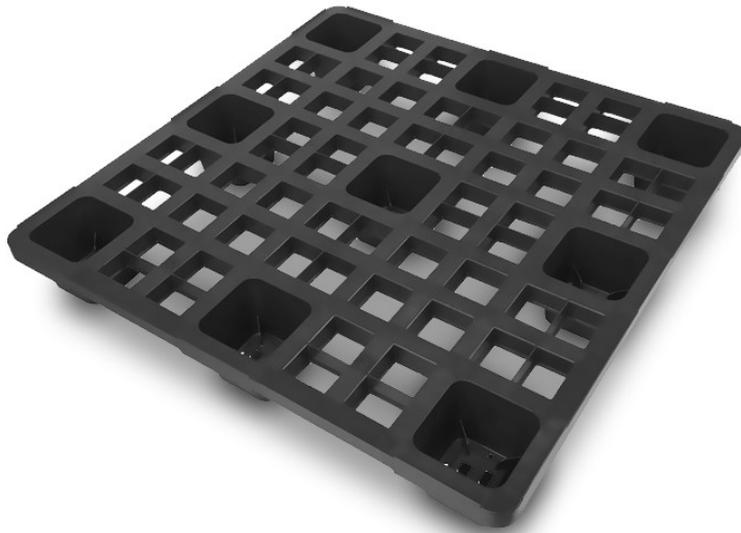

1140 x 1140mm square pallet with open deck and 9 feet, optimized for transport in ISO freight containers, the pallet uses the available load space. Ideal equipment for exports of all type of products complying with the international ISPM-15 regulation.

Advantages

- ✓ Facilidad de extracción del palet sobre torre
- ✓ Altura optimizada
- ✓ Reborde antideslizante 5mm
- ✓ Excelente solución para el transporte marítimo en contenedor

Technical data

Ref	Materials	Weigh	Measures	Static load*1	Dynamic load*1	Rack load*1
BASIC 1140-O9		9.70 kg [21.40 lb]	1140x1140x140mm [44.80x44.80x5.50"]	2500 kg [5510 lb]	1000 kg [2210 lb]	- kg [- lb]

Logistic data

Ref	20' DV	40' DV	40 HC	45' PWHC	Tauliner	Mega	Jumbo
BASIC 1140-O9	500	1000	1100	1166	1166	1320	1440

SQUARED NESTABLE PALLET 1140X1140 MM

LIGHTWEIGHT BASIC 1140-O9


Options

✓ Logo serigrafiado

✓ Otros materiales disponibles

✓ Versión disponible sin topes o de 20mm

Technical drawing

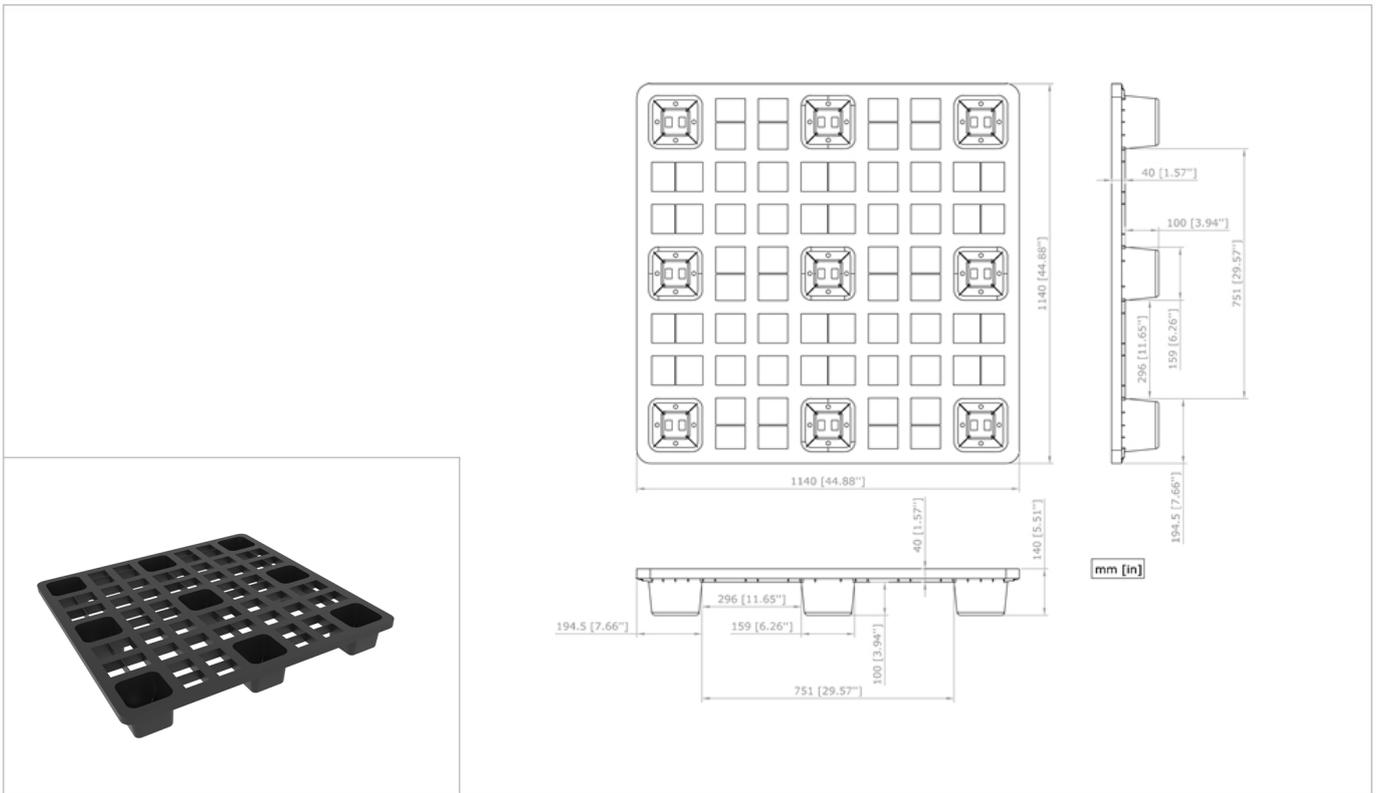

Iconography legend



0°/40°C [32°/104°F]



open



Nestable



4-ways



Rims for boxes

Recommendations for use

- ✓ Do not stack more than 85 pallets, which equates to a height of 4 m of empty pallets.
- ✓ Do not handle stacks of more than 63 empty pallets.
- ✓ Once stacked in height check that they are properly fitted.

*1 The values indicated are approximate and are based on both practical experiences and ISO 8611 tests with a uniformly distributed standard load, distributed all over the pallet surface, duly consolidated, compact and stable and at ambient temperature (20°C [68°F]) for a specific time. Different load conditions produce different values that have to be checked at the customer's request. Any deterioration or breakage in the pallet may vary these results.

*2 Due to the characteristics of the materials recycled, the dimensions and the weight of the pallets may present certain tolerances. Dimensional tolerances according to DIN ISO 2768-V and weight tolerances: +/- 4%. Except for references of the FLAT category: +/- 3%.

- Nortpalet reserves the right to modify any information herein indicated without prior notice.

- The specifications can be affected in case of alteration of the product with parts and / or materials different from those approved by the Nortpalet quality department. Any warranty, specification or liability on the part of Nortpalet will be terminated in case of modification of the product with spare parts not supplied by Nortpalet.